


Fixed Direct & Indirect Fluorescent Fittings

This surface mounted luminaire is Direct & Indirect fitted with 3 x 36W lamp in combination with perforated metal reflector on both sides and centre with VDU parabolic louvre.

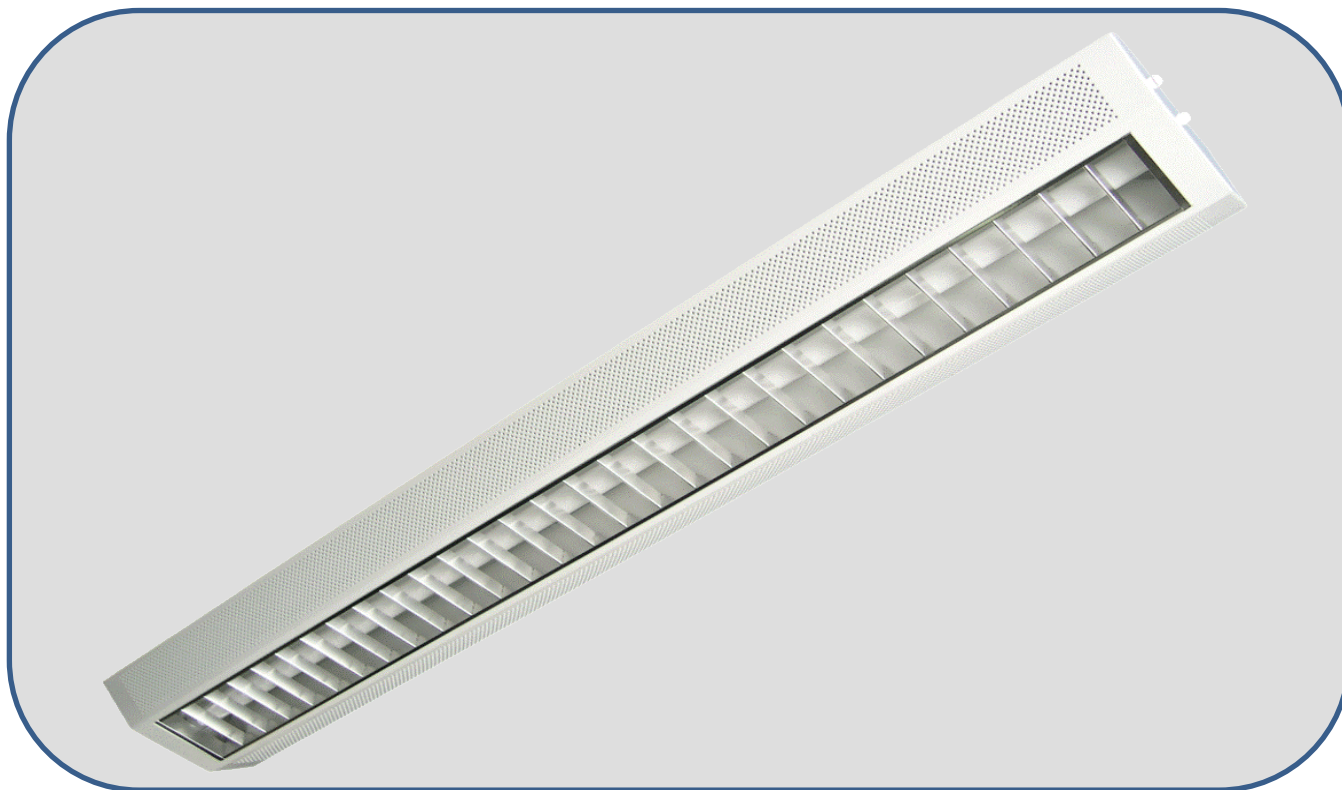

Model : KM 340 / DI

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Louvre	: High quality chemically brightened and anodized in semi-specular. Parabolic shaped vanes ensure high efficiency optimal light output with wide batwing distribution. Good uniformity and low glare.	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: Fixed or surface mounted.	
Expose Frame Dimension	: 210mm Width x 1,230mm Length x 100mm Height	
Lamp Source	: Fluorescent lamp 3 x 36W (240V 50Hz)	
Ballast	: 6W extra low loss ballast.	
Optional Components	: High frequency electronic ballast.	(EB)
	: EL emergency power pack.	(EL)
	: 2 amp Fused terminal block.	(FTB)
	: Radio interference suppressors.	(RIS)
Applications	: Lift lobby, Reception areas, Libraries and Department stores.	

Ordering Code

Example : KM 340 / DI

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com