


Rectangular Perforated Reflector Fluorescent Fittings

This luminaire is a combination of fittings and continuity rectangular perforated reflector with internal mirror reflector. The rectangular perforated reflector provides low glare light output ratio and mirror reflector provides a higher downwa light output ratio.

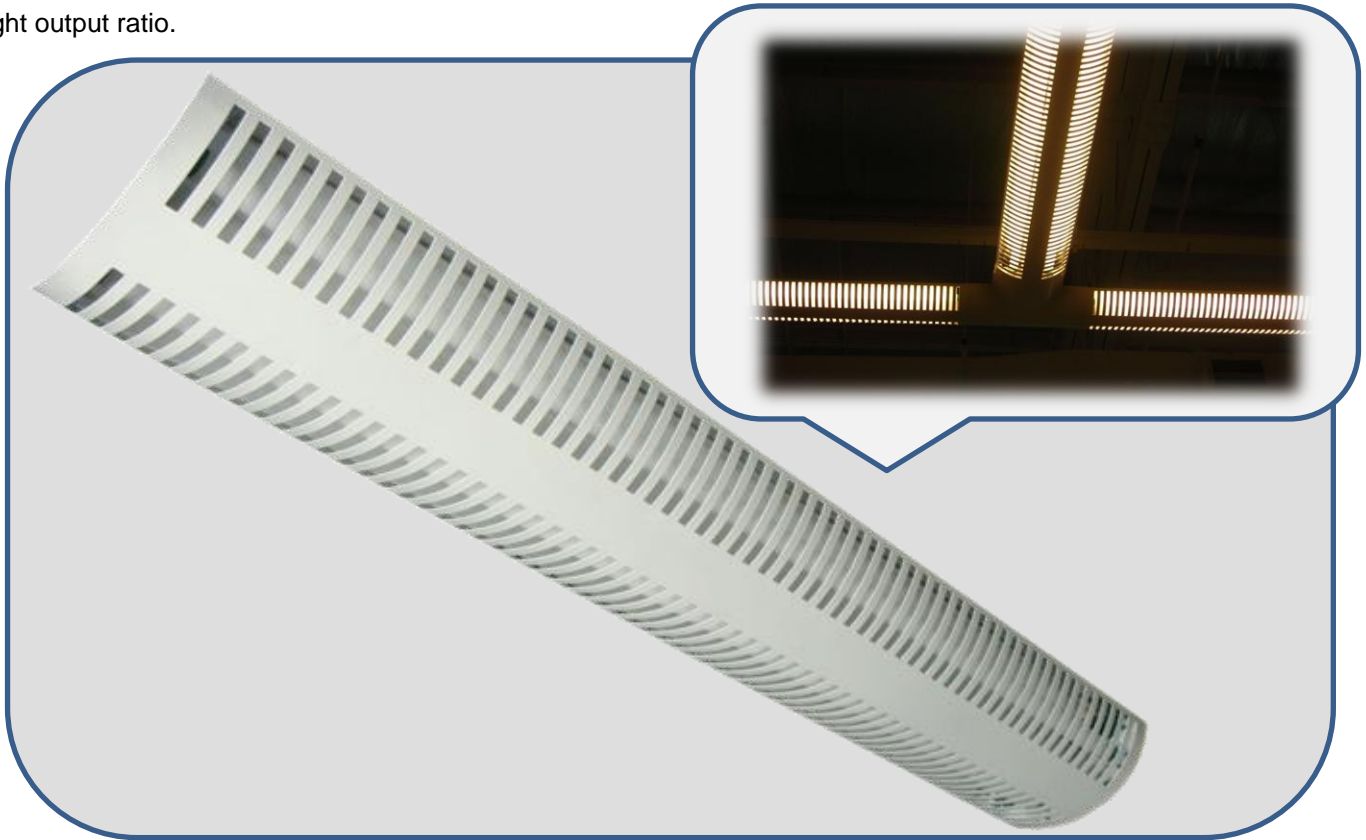

Model : KR 240 Rectangular

Technical Data

| | |
|-------------------------|---|
| Construction | : In heavy gauge steel sheet and fully pre-treated. |
| Reflector | : Pre - anodised aluminium sheet. |
| Paintwork | : High grade white polyester powder coated high reflectance finish. |
| IP Protection | : IP 20 |
| Mechanical Mounting | : Suspended with wire cable. |
| Dimension | : 215mmW x 1.242mL x 50mmHt. |
| Lamp Source | : Fluorescent lamp 2 x 36W (240V 50Hz) |
| Lamp Colour Temperature | : 2,700K / 3,000K / 4,000K or 6,500K |
| Ballast | : Philips EB - P High frequency electronic |
| Weight | : Aprox. 3.5 Kgs. |
| Accessories | : L Shaped joint : T Shaped joint. |
| Applications | : Hypermarket. |

Ordering Code

Example : KR 240 / EB

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com