


## Stainless Steel Body Fluorescent Fittings

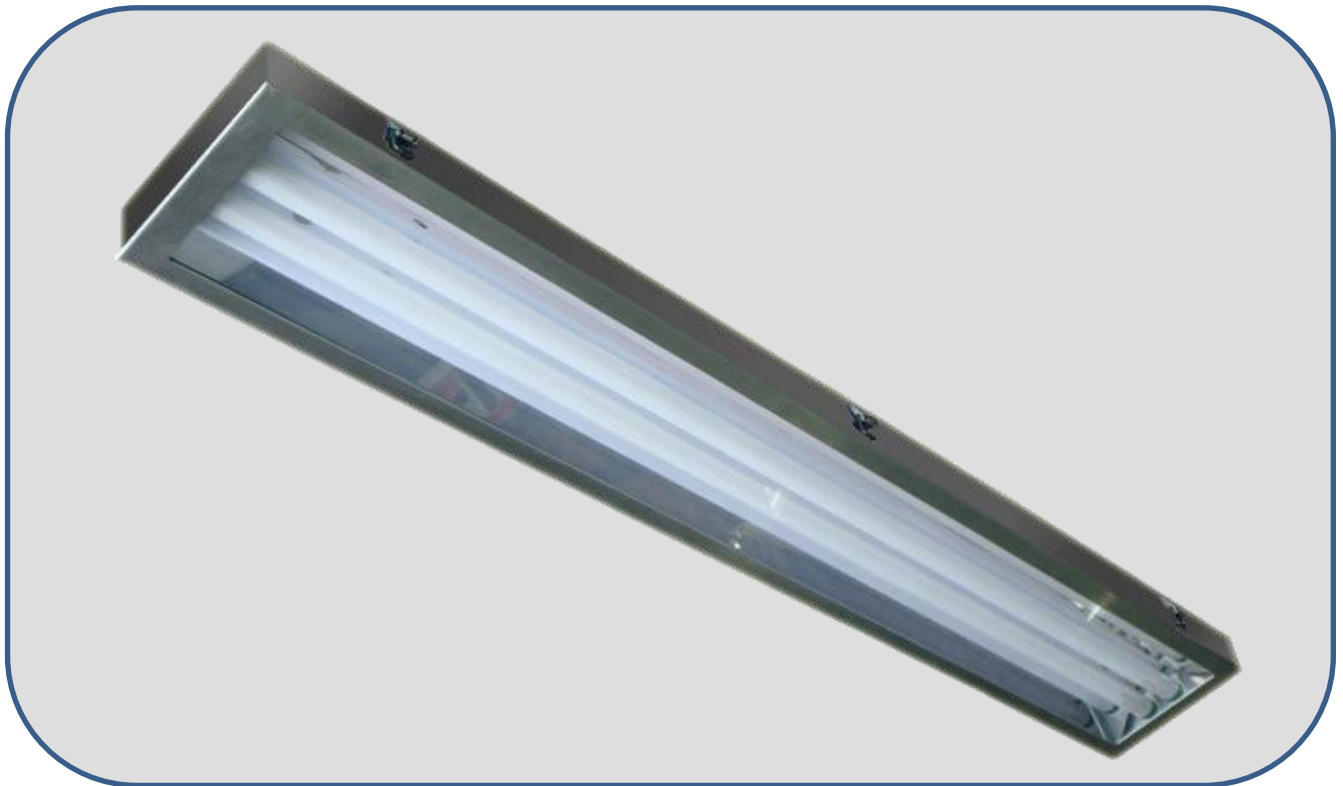

### Model : KCR240 Stainless Steel Body

#### Technical Data

Body	: Grade 304 stainless steel with polish finish.
Diffuser	: Clear polycarbonate diffuser with angles studied for total transparency.
Tightness	: 6 nos of Safety clips.
Protection	: Total protection against dust.
Mechanical Mounting	: Surface or wall mounted.
Dimension	: KCR120 1 x 18W = 140mmW x 615mmL x 80mmHt. : KCR140 1 x 36W = 140mmW x 1,225mmL x 80mmHt. : KCR220 2 x 18W = 240mmW x 615mmL x 80mmHt. : KCR240 2 x 36W = 240mmW x 1,225mmL x 80mmHt.
Lamp Source	: Fluorescent lamp 18W or 36W ( 240V 50Hz )
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K
Ballast	: 6W extra low loss ballast.
Optional Components	: High frequency electronic ballast. ( EB ) EL emergency power pack. ( EL ) 2 amp Fused terminal block. ( FTB ) Radio interference suppressors. ( RIS )
Applications	: Humid and dusty areas, Food processing areas and Room with corrosive vapours.

#### Ordering Code

#### Example : KCR 240 Stainless Steel Body

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun ( M ) Sdn.Bhd. ( 128027-W ) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 ( H/L ) Fax : 603-80753006 Email : kslite@kohsun.com