


Slim Bare Channel Wire-Guard Fluorescent Fittings

This luminaire is designed for use in areas where security of the tube are necessary. The wire guard is secured with wire mesh with end caps.

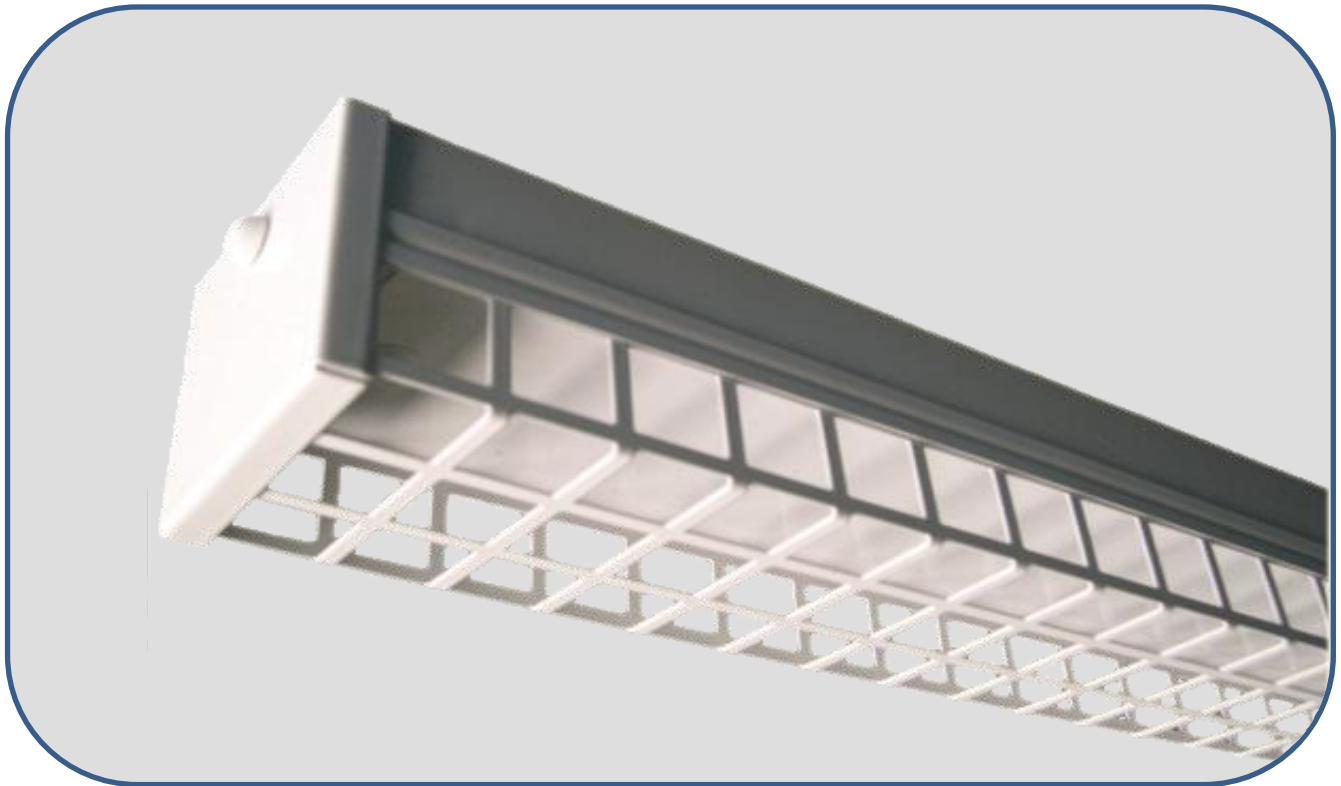

Model : KTFG - 2F

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.		
Paintwork	: High grade white polyester powder coated high reflectance finish.		
IP Protection	: IP 20		
Mechanical Mounting	: Surface or wall mounted.		
Dimension	: KTFG - 2T	2 x 14W	70mm Width x 572mm L x 65mmHeight
	: KTFG - 2T / HO	2 x 24W	70mm Width x 572mm L x 65mmHeight
	: KTFG - 2F	2 x 28W	70mm Width x 1,170mm L x 65mmHeight
	: KTFG - 2F / HO	2 x 54W	70mm Width x 1,170mm L x 65mmHeight
	: KTFG - 2FF	2 x 35W	70mm Width x 1,472mmL x 65mm Height
	: KTFG - 2FF - HO	2 x 80W	70mm Width x 1,472mm L x 65mmHeight
Lamp Source	: T-5 Fluorescent lamp		
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K		
Ballast	: Philips / Osram or equivalent.		
Optional Components	: Dimmable ballast.		
Applications	: Car park & similar location where vandalism and breakage occurs quite frequently.		

Ordering Code

Example : KTFG - 2F

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com