


## Recessed T5 Parabolic Louvre Fluorescent Fittings

This low brightness reflector provides low glare lighting with good modelling and comfortable visual conditions. The wedgeblade is suited to general office application where occasional or intermittent VDU screen working is required and to retail area application where a quality appearance is particularly appropriate. The reflector is hinged to the housing allowing easy maintenance.

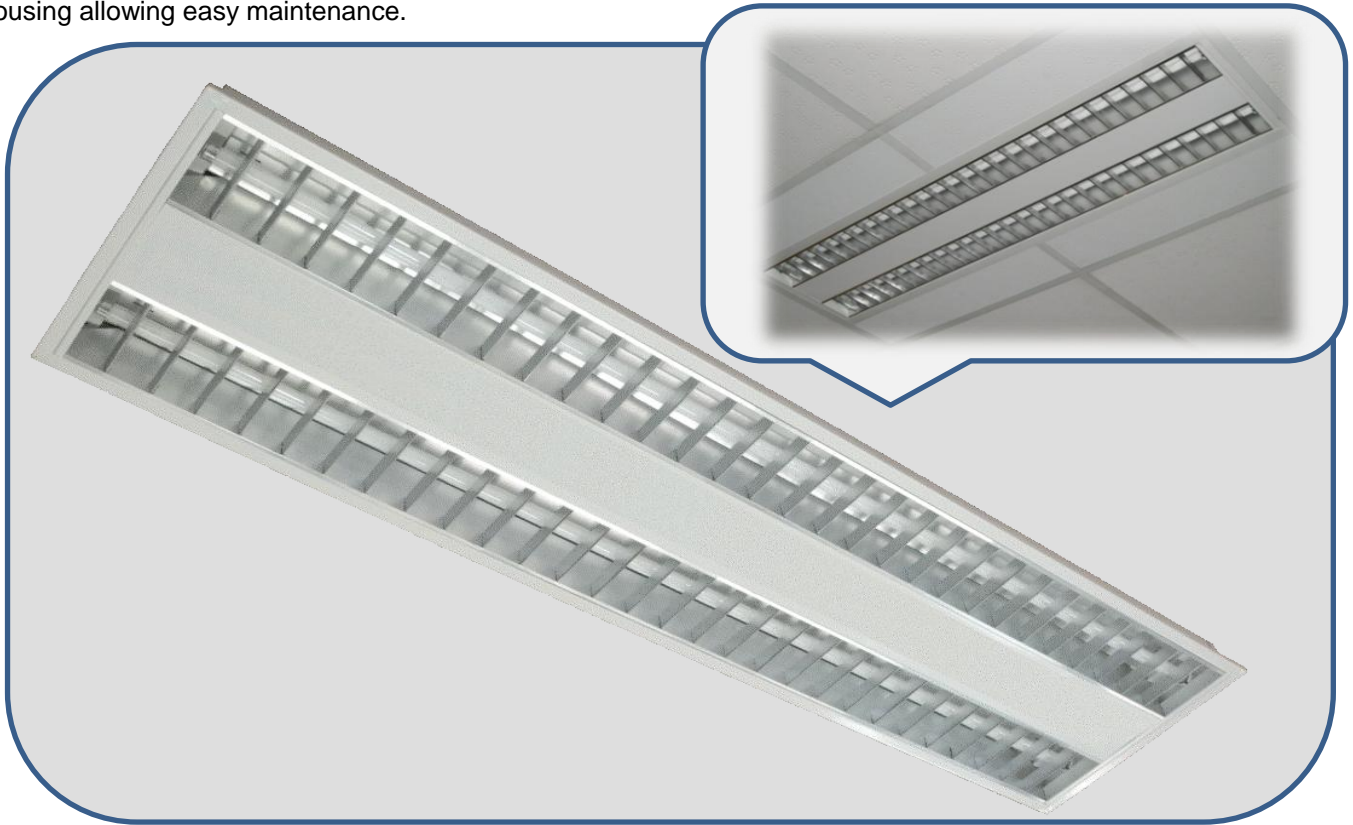

**Model : KTF - 2F**

### Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.
Louvre	: High quality, chemically brightened and anodized in semi gloss finish. Parabolic shaped vanes ensure high efficiency optimal light output with wide batwing distribution, good uniformity and low glare.
Paintwork	: High grade white polyester powder coated high reflectance finish.
IP Protection	: IP 20
Mechanical Mounting	: T - Bar suspended ceiling or plaster ceiling. ( Recessed or Modular recessed type )
Dimension : Metric	: 295mmW x 1,195mmL x 55mmHt.
Imperial	: 298mmW x 1,212mmL x 55mmHt.
Lamp Source	: T-5 Fluorescent lamp 2 x 28W or 2 x 54W
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K
Ballast	: Philips / Osram or equivalent.
Optional Components	: Dimmable ballast.
Applications	: Computer rooms, Airports, Hospital, Libraries and Department stores.

**Plaster ceiling opening**  
**( 273mmW x 1,173mmL )**  
**( 273mmW x 1,173mmL )**

### Ordering Code

**Example : KTF - 2F**

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun ( M ) Sdn.Bhd. ( 128027-W ) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 ( H/L ) Fax : 603-80753006 Email : kslite@kohsun.com