


Surface Mounted Fluorescent Fittings

This elegant surface mounted luminaire is designed for use in interiors and administrative offices where a high degree of downward lighting is required with minimum glare.

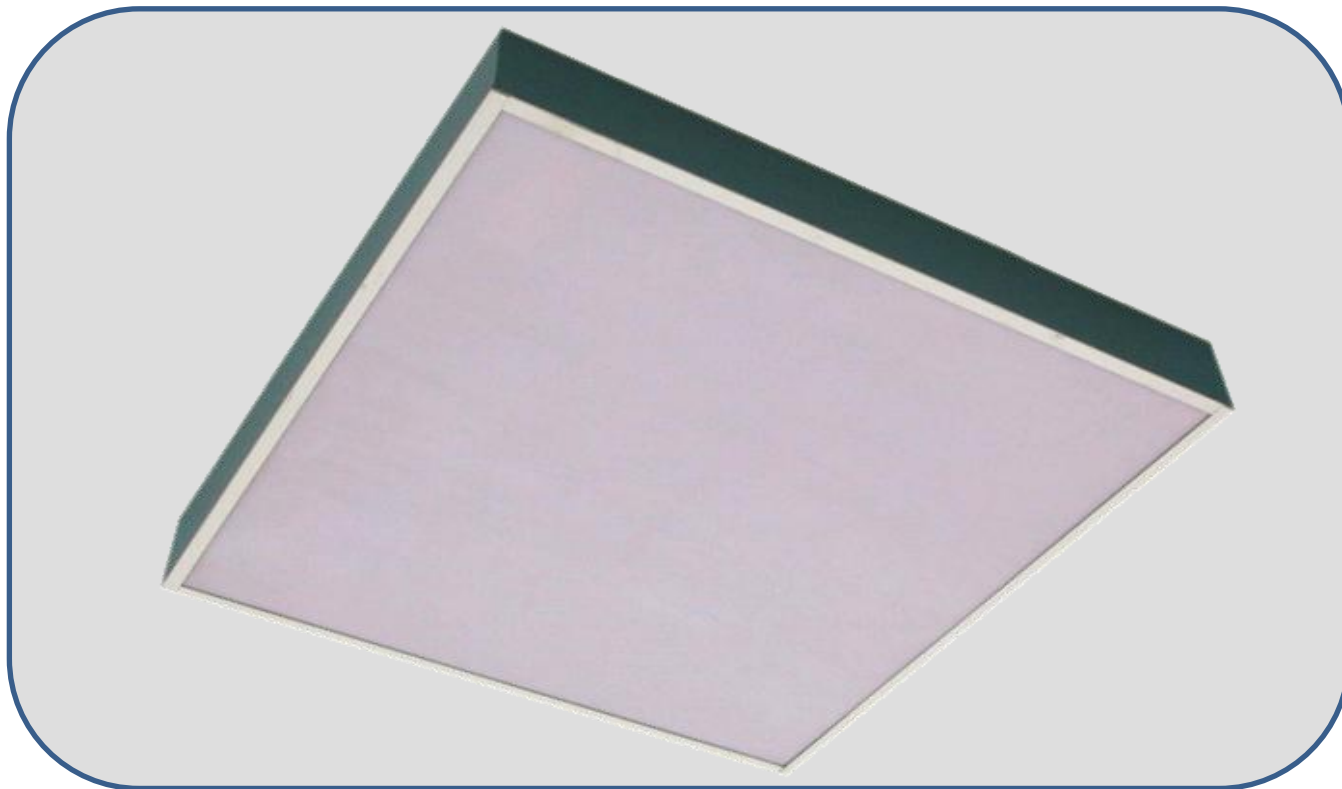

Model : KM 220

Technical Data

| | | |
|-------------------------|--|--|
| Construction | : In heavy gauge steel sheet and fully pre-treated. | |
| Diffuser | : Opal. | |
| Paintwork | : High grade white polyester powder coated high reflectance finish. | |
| IP Protection | : IP 20 | |
| Mechanical Mounting | : Surface mounted. | |
| Dimension | : KM220 2 x 18W = 305mmW x 610mmL x 83mmHt. : KM220 2 x 18W = 610mmW x 610mmL x 83mmHt. : KM320 3 x 18W = 610mmW x 610mmL x 83mmHt. : KM420 4 x 18W = 610mmW x 610mmL x 83mmHt. | |
| Lamp Source | : Fluorescent lamp 18W (240V 50Hz) | |
| Lamp Colour Temperature | : 2,700K / 3,000K / 4,000K or 6,500K | |
| Ballast | : 6W extra low loss ballast. | |
| Optional Components | : M12 Acrylic diffuser. (M12) : Parabol louvre. (P L) : High frequency electronic ballast. (EB) : EL emergency power pack. (EL) : 2 amp Fused terminal block. (FTB) : Radio interference suppressors. (RIS) | |
| Applications | : Offices, Libraries and Department stores. | |

Ordering Code

Example : KM220 / 2' X 2' / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com