


## Bare Channel Fluorescent Fittings

This is a high quality basic channel fitting with an unshielded fluorescent tube. Recommended for economical general purpose light. Suitable for ceiling mounting, wall mounting or pendent mounted by suspension rods.

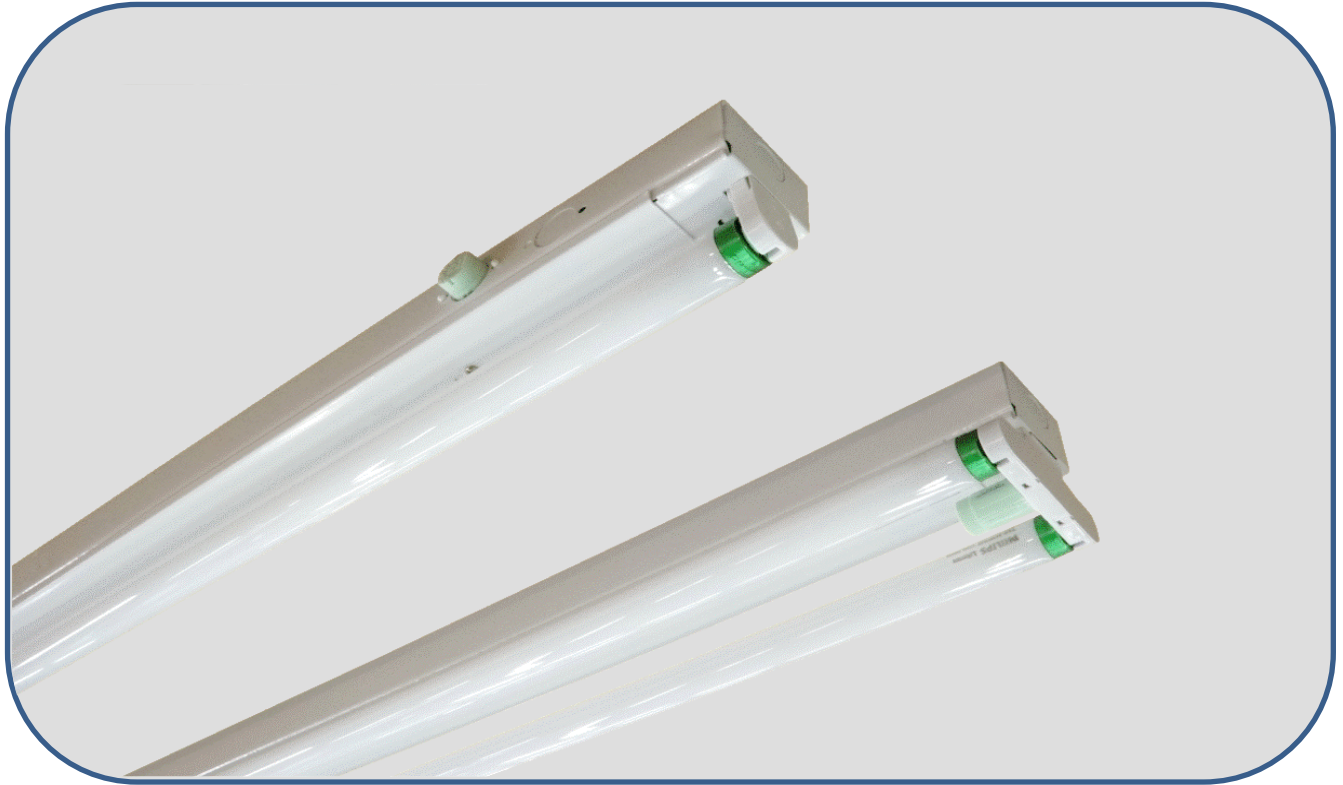

**Model : KB 140 / KB 240**

### Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: Surface or wall mounted.	
Dimension	: KB120 1 x 18W = 56mmW x 610mmL x 80mmHt. : KB220 2 x 18W = 138mmW x 610mmL x 90mmHt. : KB140 1 x 36W = 56mmW x 1,220mmL x 80mmHt. : KB240 2 x 36W = 138mmW x 1,220mmL x 90mmHt. : KB340 3 x 36W = 150mmW x 1,220mmL x 90mmHt.	
Lamp Source	: Fluorescent lamp 18W or 36W ( 240V 50Hz )	
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K	
Ballast	: 6W extra low loss ballast.	
Optional Components	: High frequency electronic ballast. ( EB ) : EL emergency power pack. ( EL ) : 2 amp Fused terminal block. ( FTB ) : Radio interference suppressors. ( RIS )	
Applications	: Storage plants, Factories, Garages, Car park & corridors.	

### Ordering Code

**Example : KB 140 / EL / FTB / RIS**

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun ( M ) Sdn.Bhd. ( 128027-W ) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 ( H/L ) Fax : 603-80753006 Email : kslite@kohsun.com