


Triangle Shaped Fluorescent Fittings

This luminaire is a modern version of the batten fitting. The arrangement gives a pleasing appearance as well as better light output.

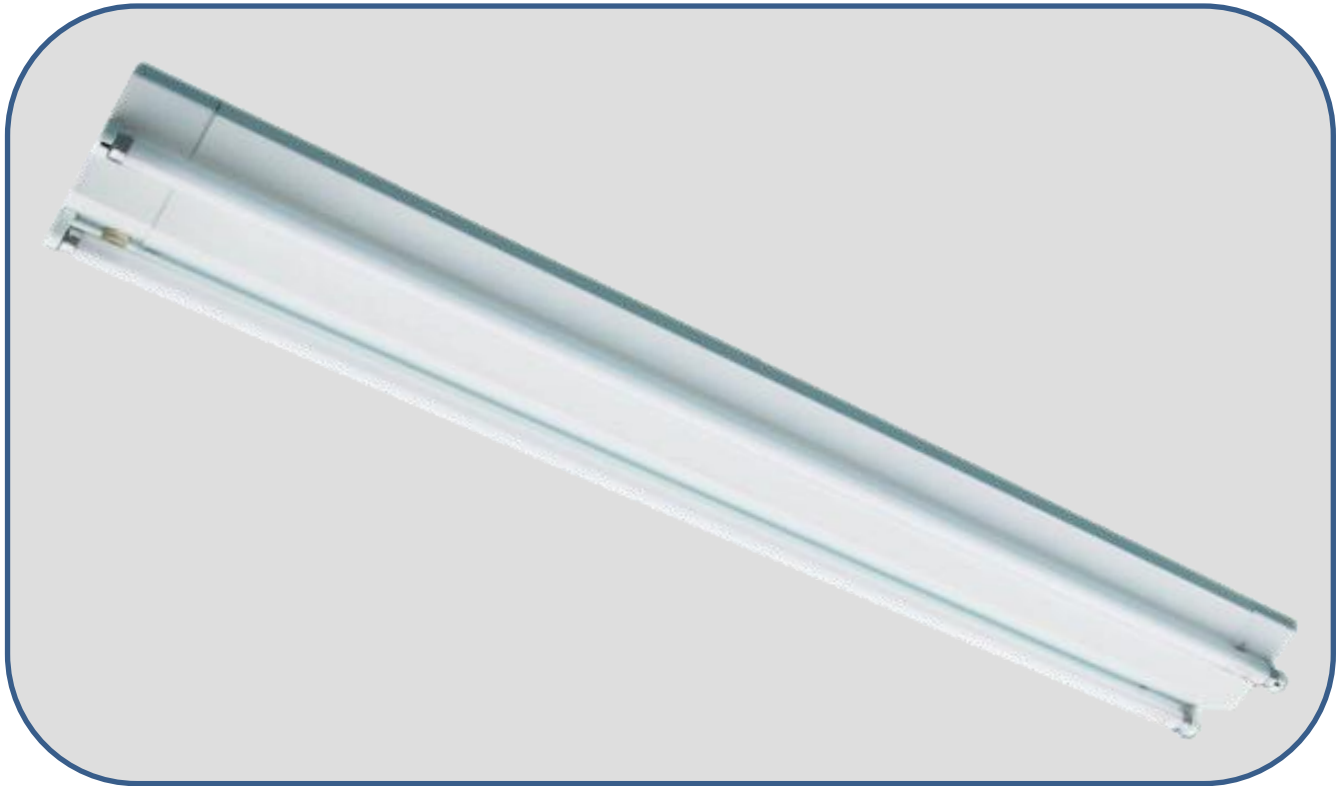

Model : KB 240

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: Surface mounted.	
Dimension	: KB/TS220 2 x 18W = 190mmW x 616mmL x 75mmHt. : KB/TS240 2 x 36W = 190mmW x 1,225mmL x 75mmHt.	
Lamp Source	: Fluorescent lamp 2 x 18W or 2 x 36W (240V 50Hz)	
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K	
Ballast	: 6W extra low loss ballast.	
Optional Components	: High frequency electronic ballast.	(EB)
	: EL emergency power pack.	(EL)
	: 2 amp Fused terminal block.	(FTB)
	: Radio interference suppressors.	(RIS)
Applications	: Supermarket and Production line.	

Ordering Code

Example : KB 240 Triangle Shaped / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com