


## Corner Light Fluorescent Fittings

This luminaire has been specially designed with an angle opal diffuser to produce an asymmetric light distribution.

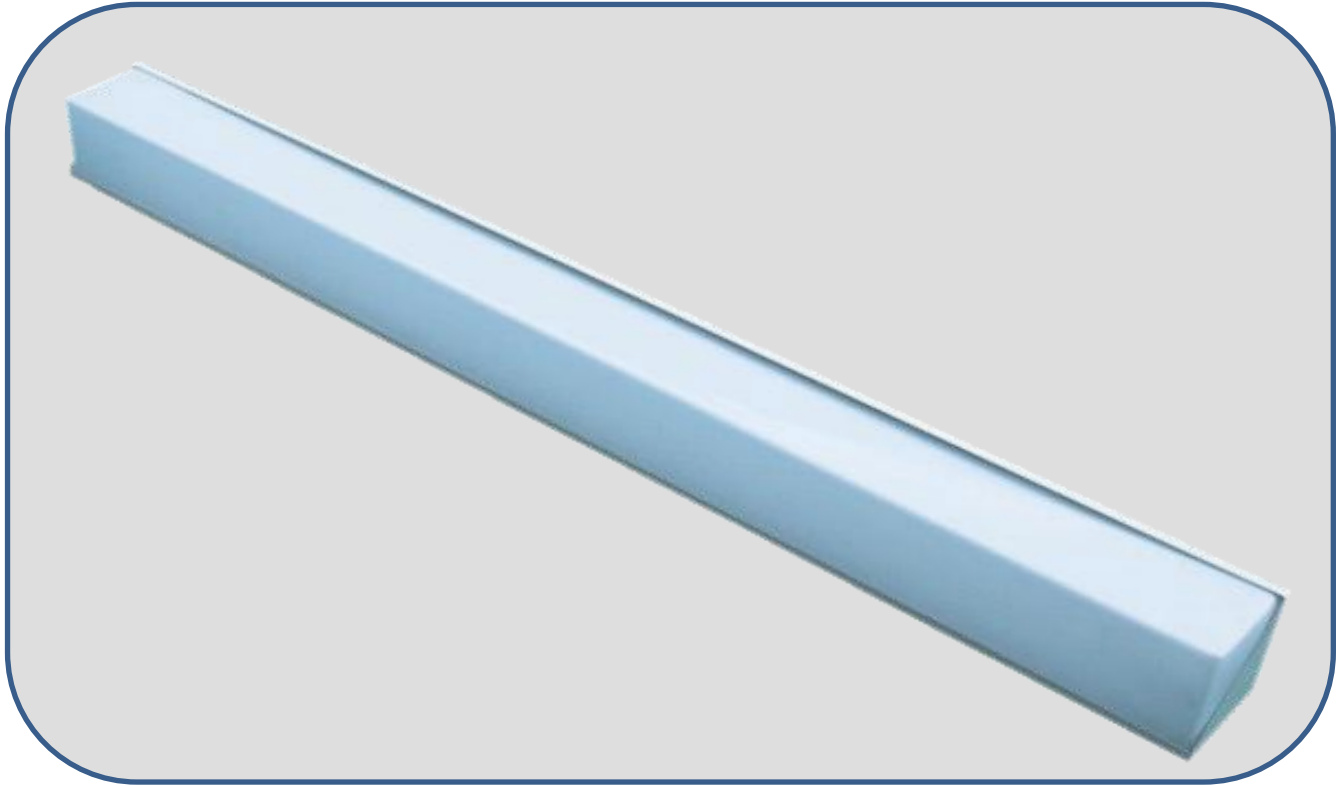

### Model : KB 140 Corner Light

#### Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: Surface mounted.	
Dimension	: KB/CL120 1 x 18W = 100mmW x 616mmL x 100mmHt. : KB/CL140 1 x 36W = 100mmW x 1,225mmL x 100mmHt.	
Lamp Source	: Fluorescent lamp 1 x 18W or 1 x 36W ( 240V 50Hz )	
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K	
Ballast	: 6W extra low loss ballast.	
Optional Components	: High frequency electronic ballast.	( EB )
	: EL emergency power pack.	( EL )
	: 2 amp Fused terminal block.	( FTB )
	: Radio interference suppressors.	( RIS )
Applications	: Washing room.	

#### Ordering Code

**Example : KB/CL 140 / EL / FTB / RIS**

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun ( M ) Sdn.Bhd. ( 128027-W ) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara,  
47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 ( H/L ) Fax : 603-80753006 Email : kslite@kohsun.com

Rev. A