


Bare Channel Metal Reflector Fluorescent Fittings

This luminaire is a combination of fittings and open-ended reflector. The reflector provides a higher downward light output ratio and is recommended for use where illumination is required to concentrate at certain areas. Suitable for ceiling mounting or pendant mounted by suspension rods.

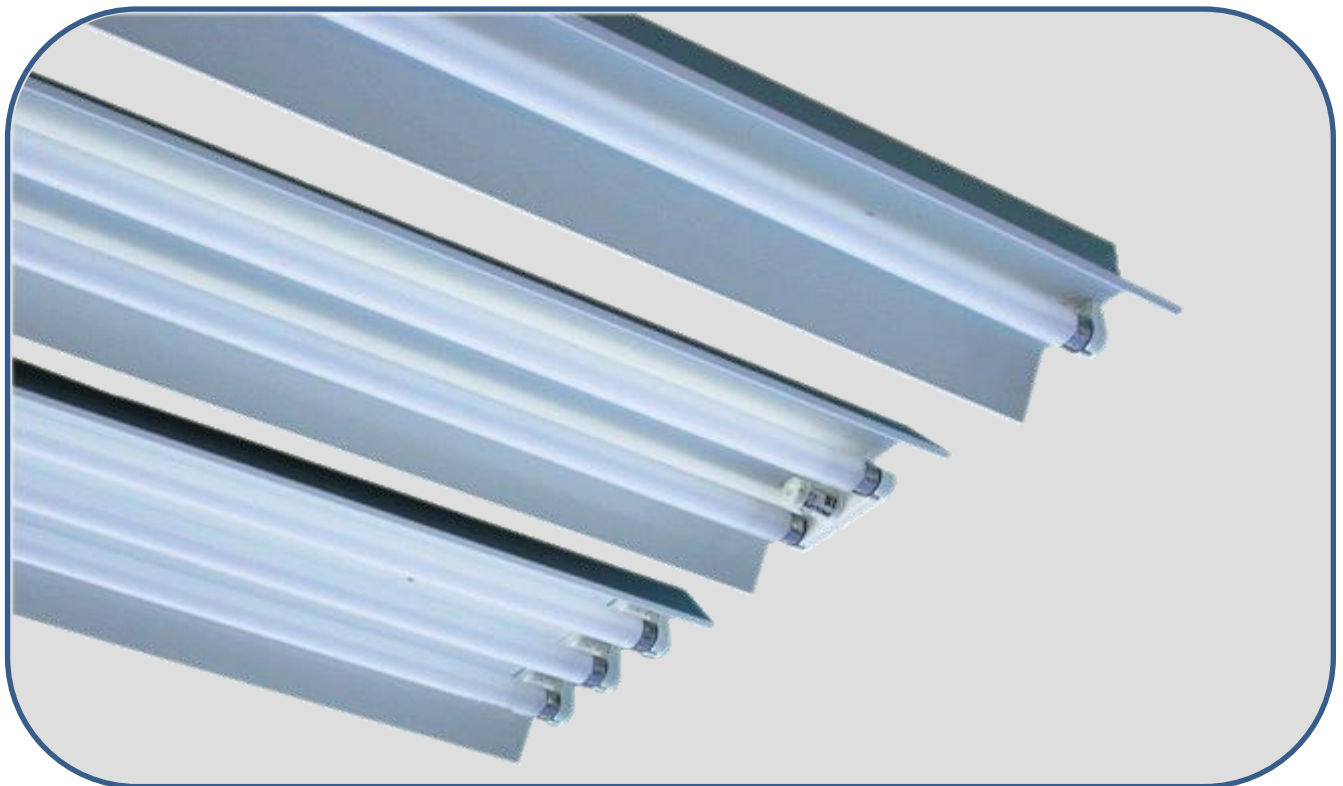

Model : KR 140, KR 240 & KR 340

Technical Data

| | | |
|-------------------------|---|--|
| Construction | : In heavy gauge steel sheet and fully pre-treated. | |
| Paintwork | : High grade white polyester powder coated high reflectance finish. | |
| IP Protection | : IP 20 | |
| Mechanical Mounting | : Surface or wall mounted. | |
| Dimension | : KR120 1 x 18W = 138mmW x 610mmL x 85mmHt. : KR220 2 x 18W = 208mmW x 610mmL x 85mmHt. : KR140 1 x 36W = 138mmW x 1,220mmL x 85mmHt. : KR240 2 x 36W = 208mmW x 1,220mmL x 85mmHt. : KR340 3 x 36W = 250mmW x 1,220mmL x 85mmHt. | |
| Lamp Source | : Fluorescent lamp 18W or 36W (240V 50Hz) | |
| Lamp Colour Temperature | : 2,700K / 3,000K / 4,000K or 6,500K | |
| Ballast | : 6W extra low loss ballast. | |
| Optional Components | : High frequency electronic ballast. (EB) : EL emergency power pack. (EL) : 2 amp Fused terminal block. (FTB) : Radio interference suppressors. (RIS) | |
| Applications | : Workshops, Warehouses, Factories and Industrial production line. | |

Ordering Code

Example : KR 140 / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslide@kohsun.com