


Channel Daikon Diffuser Fluorescent Fittings

This surface mounted luminaire is designed to meet the performance of visual comfort and appearance.

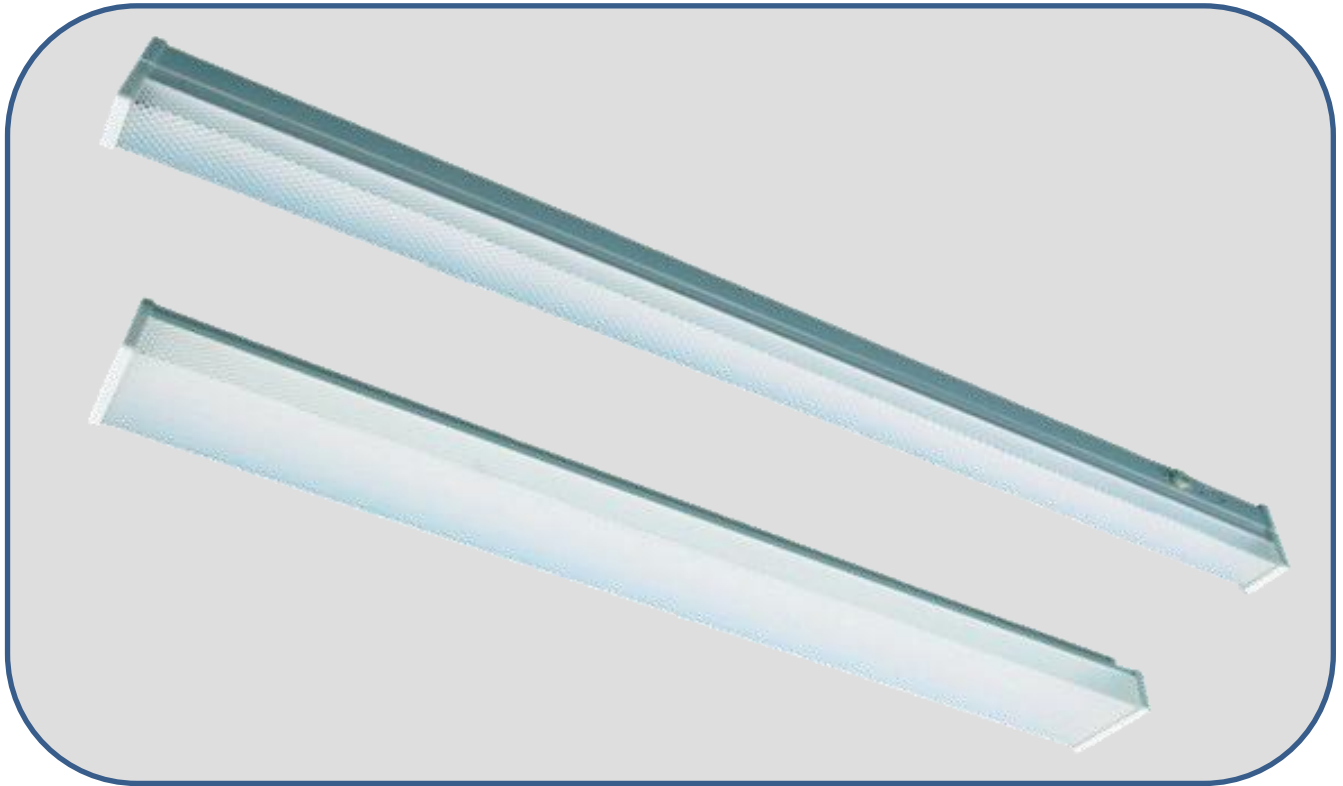

Model : KD240 and KD140

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Diffuser	: M12 Arcylic	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: Surface or wall mounted.	
Dimension	: KD120 1 x 18W = 63mmW x 610mmL x 93mmHt. : KD220 2 x 18W = 128mmW x 610mmL x 103mmHt. : KD140 1 x 36W = 63mmW x 1,220mmL x 93mmHt. : KD240 2 x 36W = 128mmW x 1,220mmL x 103mmHt.	
Lamp Source	: Fluorescent lamp 18W or 36W (240V 50Hz)	
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K	
Ballast	: 6W extra low loss ballast.	
Optional Components	: Opal diffuser. (O) : High frequency electronic ballast. (EB) : EL emergency power pack. (EL) : 2 amp Fused terminal block. (FTB) : Radio interference suppressors. (RIS)	
Applications	: Staircase areas, Toilets and Corridors.	

Ordering Code

Example : KD 140 / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com