


Suspended Ceiling Fluorescent Fittings

This fully recessed luminaire is designed for exposed Tee-Bar suspended ceiling with a wide range of diffuser to suit individuals taste and preferences.

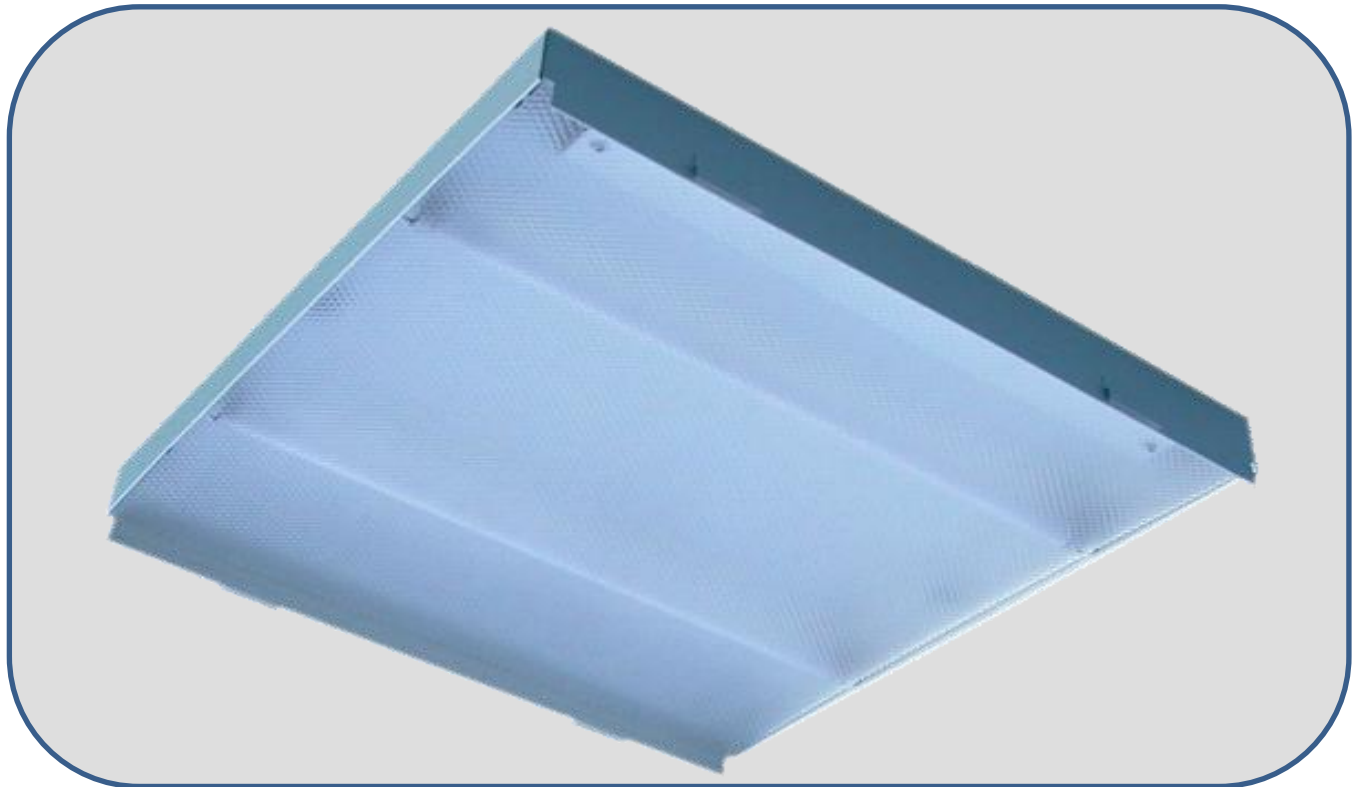

Model : KSC 220

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.	
Diffuser	: M12 Acrylic diffuser.	
Paintwork	: High grade white polyester powder coated high reflectance finish.	
IP Protection	: IP 20	
Mechanical Mounting	: T - Bar suspended ceiling. (Recessed Type)	
Dimension	: KSC220 2 x 18W = 298mmW (Imperial) or 295mmW (Metric) x 613mmL x 105mmHt. : KSC220 2 x 18W = 603mmW (Imperial) or 595mmW (Metric) x 613mmL x 105mmHt. : KSC320 3 x 18W = 603mmW (Imperial) or 595mmW (Metric) x 613mmL x 105mmHt. : KSC420 4 x 18W = 603mmW (Imperial) or 595mmW (Metric) x 613mmL x 105mmHt.	
Lamp Source	: Fluorescent lamp 18W (240V 50Hz)	
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K	
Ballast	: 6W extra low loss ballast.	
Optional Components	: Opal. (O) : Parabol louvre. (P L) : High frequency electronic ballast. (EB) : EL emergency power pack. (EL) : 2 amp Fused terminal block. (FTB) : Radio interference suppressors. (RIS)	
Applications	: Offices, Libraries and Department stores.	

Ordering Code

Example : KSC220 / 2' X 2' / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara, 47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com