


Suspended Ceiling Fluorescent Fittings

This fully recessed luminaire is designed for exposed Tee-Bar suspended ceiling with a wide range of diffuser to suit individuals taste and preferences.

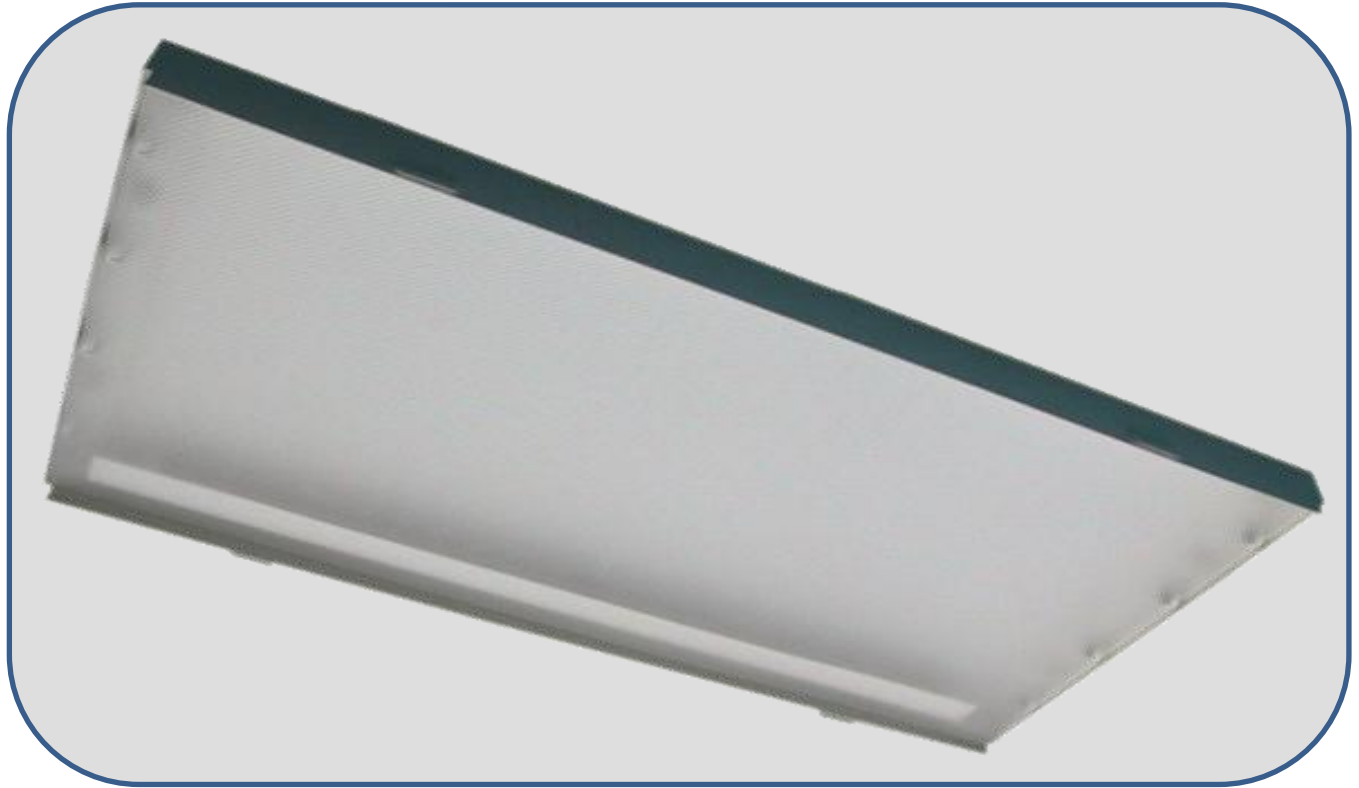

Model : KSC 240

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.
Diffuser	: M12 Acrylic diffuser.
Paintwork	: High grade white polyester powder coated high reflectance finish.
IP Protection	: IP 20
Mechanical Mounting	: T - Bar suspended ceiling. (Recessed Type)
Dimension	: KSC240 2 x 36W = 298mmW (Imperial) or 295mmW (Metric) x 1223mmL x 105mmHt. : KSC240 2 x 36W = 603mmW (Imperial) or 595mmW (Metric) x 1223mmL x 105mmHt. : KSC340 3 x 36W = 603mmW (Imperial) or 595mmW (Metric) x 1223mmL x 105mmHt. : KSC440 4 x 36W = 603mmW (Imperial) or 595mmW (Metric) x 1223mmL x 105mmHt.
Lamp Source	: Fluorescent lamp 36W (240V 50Hz)
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K
Ballast	: 6W extra low loss ballast.
Optional Components	: Opal. (O) : Parabol louvre. (P L) : High frequency electronic ballast. (EB) : EL emergency power pack. (EL) : 2 amp Fused terminal block. (FTB) : Radio interference suppressors. (RIS)
Applications	: Offices, Libraries and Department stores.

Ordering Code

Example : KSC240 / 2' X 4' / EL / FTB / RIS

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.

Manufacturer : Kohsun (M) Sdn.Bhd. (128027-W) No. 11, Jalan BK1/11, Kinrara Industrial Park, Bandar Kinrara,
47180 Puchong, Selangor D.E, Malaysia. Tel : 603-80751662 (H/L) Fax : 603-80753006 Email : kslite@kohsun.com