


Recessed T5 Parabolic Louvre Air Handling Fittings

This low brightness reflector provides low glare lighting with good modelling and comfortable visual conditions. The wedgeblade is suited to general office application where occasional or intermittent VDU screen working is required and to retail area application where a quality appearance is particularly appropriate. The reflector is hinged to the housing allowing easy maintenance. The luminaire can be supplied with two air slots along of the luminaire which can be used for air handling purposes.

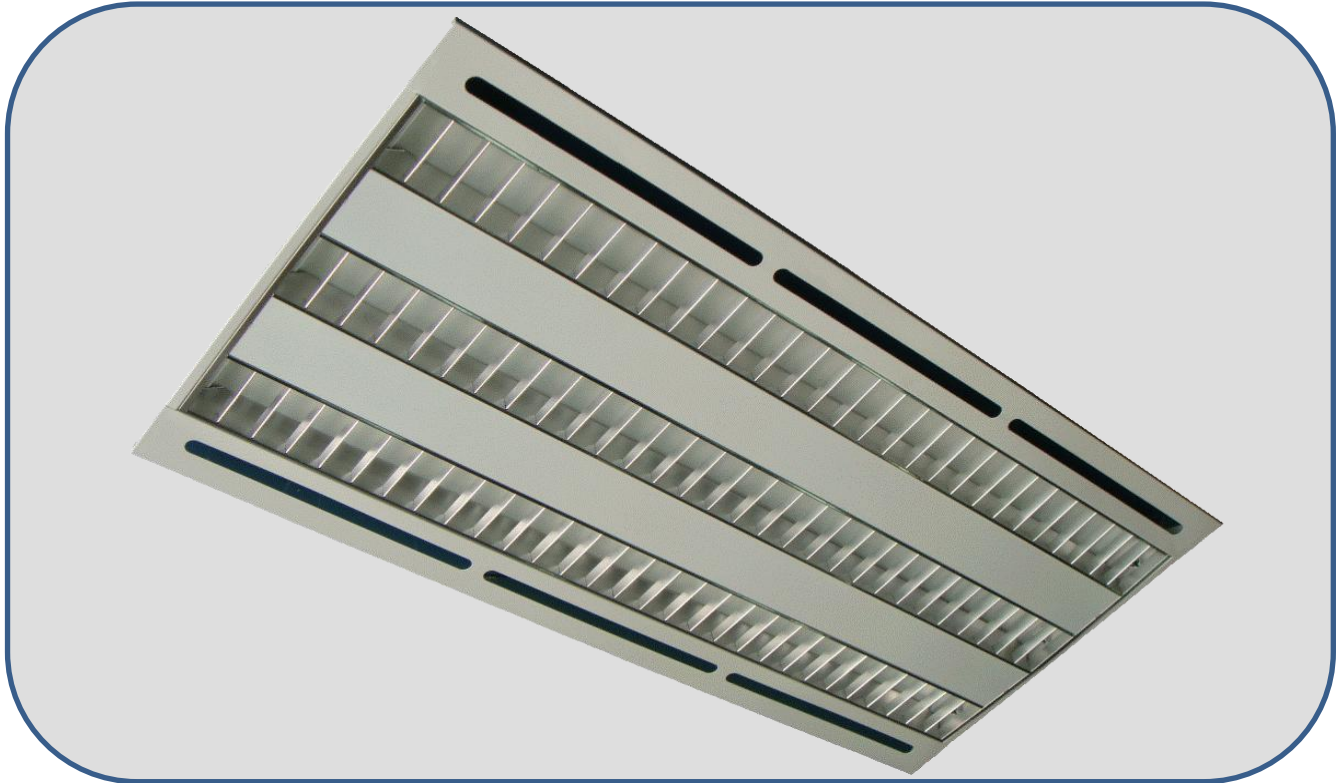

Model : KTF - 3F

Technical Data

Construction	: In heavy gauge steel sheet and fully pre-treated.
Louvre	: High quality, chemically brightened and anodized in semi gloss finish. Parabolic shaped vanes ensure high efficiency optimal light output with wide batwing distribution, good uniformity and low glare.
Paintwork	: High grade white polyester powder coated high reflectance finish.
IP Protection	: IP 20
Mechanical Mounting	: T - Bar suspended ceiling.
Dimension : Metric	: 595mmW x 1,195mmL x 55mmHt.
Imperial	: 603mmW x 1,212mmL x 55mmHt.
Lamp Source	: T-5 Fluorescent lamp 3 x 28W or 3 x 54W.
Lamp Colour Temperature	: 2,700K / 3,000K / 4,000K or 6,500K
Ballast	: Philips / Osram or equivalent.
Optional Components	: Dimmable ballast.
Applications	: Computer rooms, Airports, Hospital, Libraries and Department stores.

Ordering Code

Example : KTF - 3F

Fittings can be supplied in other dimensions if required. All specification and designs shown in this catalogue are subject to change w/o prior notice.